

■ ■ ■ Oracle Data Guard –
Fast Start Failover understood!



Dr. Martin Wunderli
<http://www.trivadis.com>

Principal Consultant
Partner

trivadis
makes IT easier. ■ ■ ■

Basel · Baden · Bern · Lausanne · Zurich · Düsseldorf · Frankfurt/M. · Freiburg i. Br. · Hamburg · Munich · Stuttgart · Wien

Trivadis Facts & Figures



- 12 locations
 - D: Dusseldorf, Frankfurt, Freiburg, Hamburg, Munich, Stuttgart
 - A: Vienna
 - CH: Baden, Basle, Bern, Lausanne, Zurich
- Consolidated income
CHF 86 million / EUR 55 million
- Over 470 employees
- Over 450 clients
- Over 1'400 projects per year using Oracle, Microsoft, IBM and OSS Technology
- Over 110 Service Level Agreements
- About 4'000 training participants per year


FSFO understood!



Data is always part of the game.

- Concept, History and Positioning
- The startup issue
- Fast Start Failover
- Conclusion


Oracle Standby Databases and Data Guard – Overview

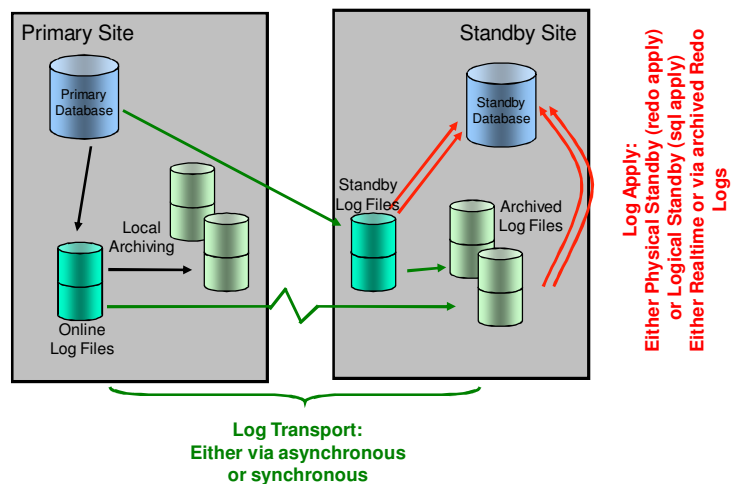

Standby Databases: A short history



- **Oracle 7.3:** Creating and mounting a standby database
- **Oracle 8i:** Automated archived redo log transport and application, TAF, open read-only of standby database
- **Oracle 9i:** Data Guard and Data Guard Broker with switchover, close log gap, delayed redo application, GUI and **no-data-loss** setups (**sync transport**)
- **Oracle 10g:** Simplified syntax, RAC support, partial failover cluster support, reuse of old primary as new standby database, **automatic standby activation**

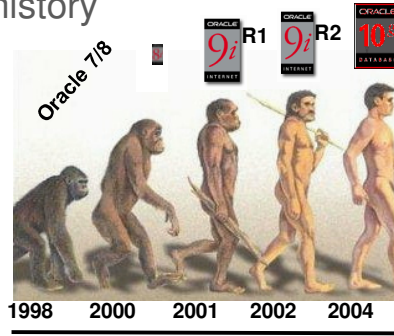

Fast Start Failover understood

5

© 2006 **trivadis**
making IT easier

Why Data Guard (and not e.g. a Failover Cluster)?



- In case of a disaster protection setup (data must be mirrored between at least two locations), bandwidth usage is smaller: Even high transaction systems typically need only approx. 70 MBit/s bandwidth
- No extra software layer and license needed (if you already licensed Oracle Enterprise Edition on primary and standby server...)
- No file system or instance recovery of database needed after crash of primary server (standby is up to date in case of No-Data-Loss setup and 10gR2)
- Standby Database is usable for queries (e.g. reports)
- Mirroring the log information is separated from applying it, allowing to delay Standby Database update without compromising protection

Fast Start Failover understood

6

© 2006 **trivadis**
making IT easier

Why a Failover Cluster (and not Data Guard)?



- File system based mirroring is needed because of non-database files
- IP address failover is needed for e.g. an application server
- DBA knowledge is not available

- In case that features from the slide before (e.g. instance recovery time and bandwidth between locations) are also crucial, a combination of Failover Cluster and Data Guard between the same machines may be necessary

Fast Start Failover understood

7

© 2006  trivadis
making IT easier

Failover Cluster vs. Data Guard



- Remember...
- Fast Start Failover for Data Guard is **not** a failover cluster with
 - Two connections between nodes (network and disk) where the loss of one connection results in node shutdown
 - A single location of data files (from the point of view of Oracle RDBMS)
- These two points have positive and negative impact
 - Nodes stay longer up and in their role in case of partial inter node connection loss
 - Automatic failover may not be possible after partial inter node connection loss


Fast Start Failover understood

8

© 2006  trivadis
making IT easier

FSFO understood!

■■■




Data is always part of the game.

- Concept, History and Positioning
- The startup issue
- Fast Start Failover
- Conclusion

Fast Start Failover understood © 2006 **trivadis**
making IT easier

Physical Standby: Startup Behavior 10g versus 9i

■■■

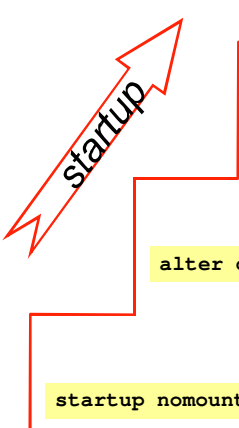

`alter database open; # Primary`
or
`recover managed standby database; # Standby`

`alter database mount;`

`startup nomount`

Data Guard Broker 10g takes over and opens primary database if...

Data Guard Broker 9i takes over

Fast Start Failover understood © 2006 **trivadis**
making IT easier

Physical Standby – Startup Issue



- What is the biggest problem for data consistency in a cluster?



Split Brain!

- What is the biggest problem for data consistency in a Data Guard environment?



More than one primary!

- How can this happen?
Primary startup (Hardware fixed etc.) after standby activation

Fast Start Failover understood

11

© 2006 **trivadis**
making IT easier

Primary Startup after Failover: Network connected



- OK:** STARTUP MOUNT of former primary database
 - Data Guard Broker takes over and handles startup process
 - The Broker knows about the failover and the resulting change of the primary database
 - The former primary database is not started

```
DGMGRL> show configuration;
Error: ORA-16795: database resource guard detects that database
re-creation is required
Configuration details cannot be determined by DGMGRL
```

- BAD:** STARTUP of former primary database
 - Results in two primary databases since sqlplus does not know of the Data Guard Broker configuration

Fast Start Failover understood

12

© 2006 **trivadis**
making IT easier

Primary Startup after Failover: Network interrupted



- **BAD: STARTUP** of former primary database
 - Results in two primary databases since sqlplus does not know of the Data Guard Broker configuration
- **BAD: STARTUP MOUNT** of former primary database
 - Data Guard Broker tries to verify the Data Guard configuration
 - After 5 unsuccessful requests, Data Guard Broker opens the former primary database ☹



Fast Start Failover understood

13

© 2006  trivadis
making IT easier

Startup: Variants



1. Only mount Primary and Standby Database during system boot
2. Manual database startup after system boot 
3. Adapt TNSNAMES or LDAP server so that old Primary is not found anymore. But local jobs...
4. Is there a better solution? Yes, see Fast Start Failover! 

Fast Start Failover understood


14

© 2006  trivadis
making IT easier

FSFO understood!

■ ■ ■

- Concept, History and Positioning
- The startup issue
- Fast Start Failover
- Conclusion



Data is always part of the game.

Fast Start Failover understood

15

© 2006 **trivadis**
making IT easier

Fast-Start Failover

■ ■ ■

- Main criticism of Oracle standby databases: too much manual interaction

1. Manual interaction is required for a failover
 - Need some administrative checks before to validate the status of the standby database, e.g. if all redo are applied
 - More downtime ☹
2. Manual interaction to recreate a new standby database
 - No HA until the setup of the new standby is finished
3. Manual interaction is needed for startup if two primaries have to be avoided at all cost

- Fast Start Failover addresses all three problems!

Fast Start Failover understood


16

© 2006 **trivadis**
making IT easier


Fast Start Failover: Concept




1. Observed Data Guard environment



1. Fast-Start-Failover (automatic)



1. Reinstatement (automatic)



Fast Start Failover understood

17

© 2006 **trivadis**
making IT easier

When is a Fast-Start Failover triggered?



- Primary site failure
 - Server crash or server shutdown (without database shutdown)
- Primary database failure
 - Instance failure (last running instance if RAC)
 - Shutdown abort (but not with normal or immediate)
 - Data file is taken offline
- Network failure (special case)
 - Documentation of when and when not automatic activation will happen is quite large. Read and test carefully. We will show one case.

Fast Start Failover understood

18

© 2006 **trivadis**
making IT easier

Network Failure (1)

■■■

```

Select fs_failover_status,fs_failover_observer_present
from v$database; -- on primary site
FS_FAILOVER_STATUS      FS_FAILOVER_OBSERVER_PRESENT
-----
SYNCHRONIZED           NO
    
```

Fast Start Failover understood © 2006 **trivadis**
making IT easier



Network Failure (2)



■■■



```

Select fs_failover_status,fs_failover_observer_present
from v$database; -- on primary site
FS_FAILOVER_STATUS      FS_FAILOVER_OBSERVER_PRESENT
-----
STALLED                 NO
    
```

Fast Start Failover understood © 2006 **trivadis**
making IT easier

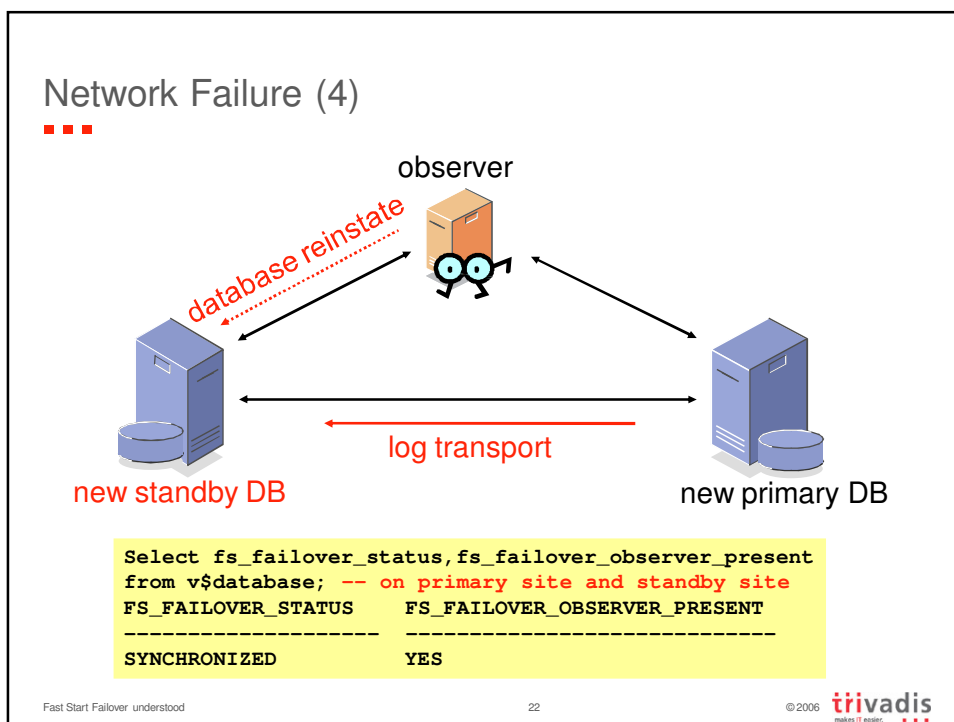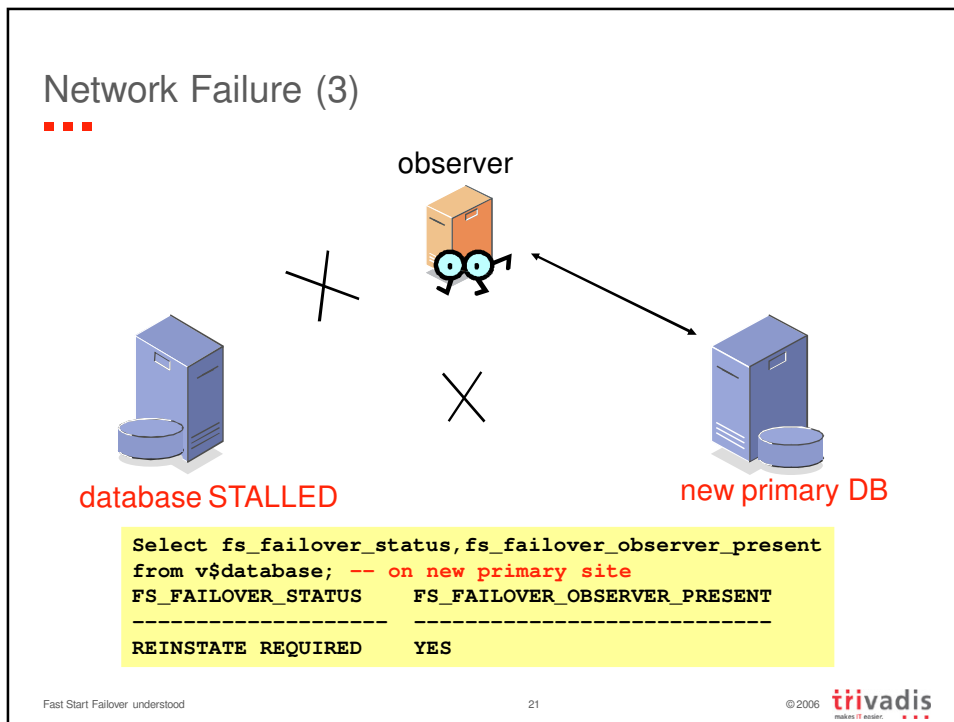

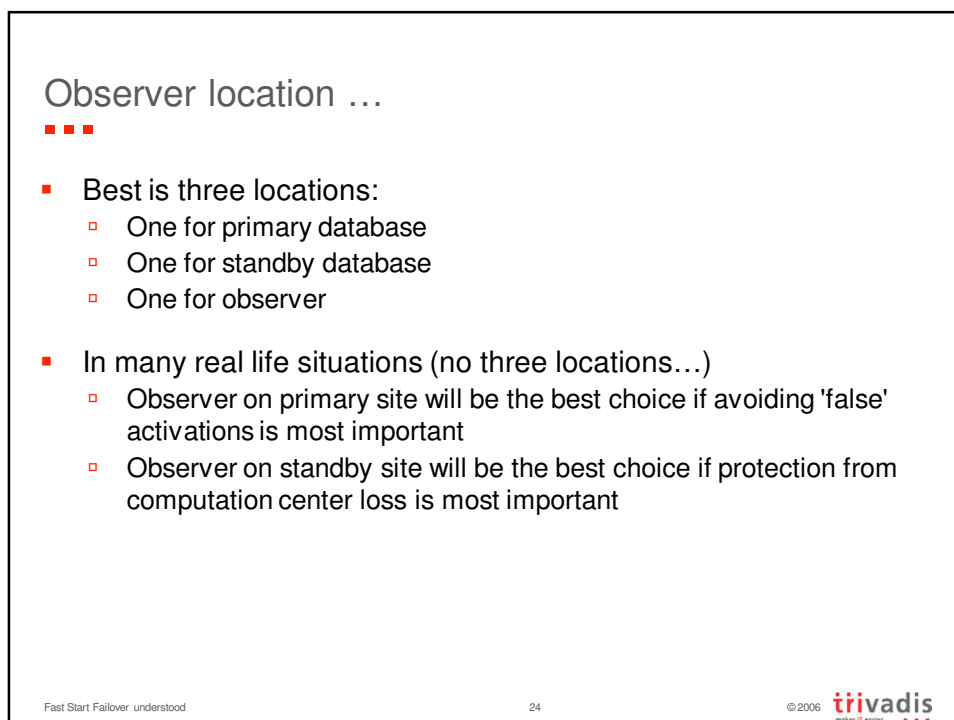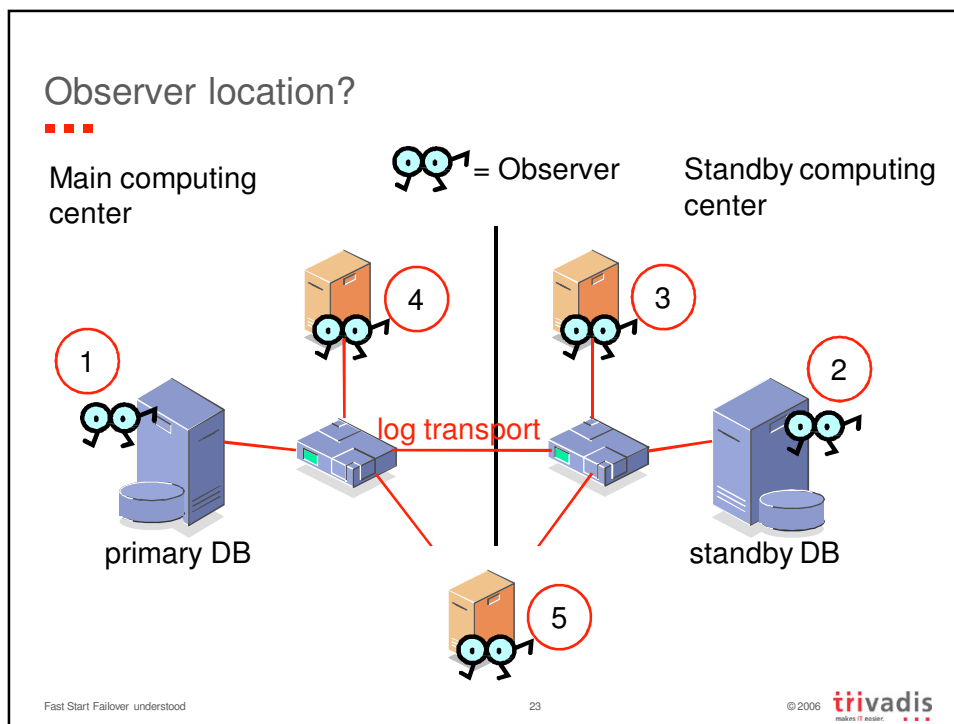

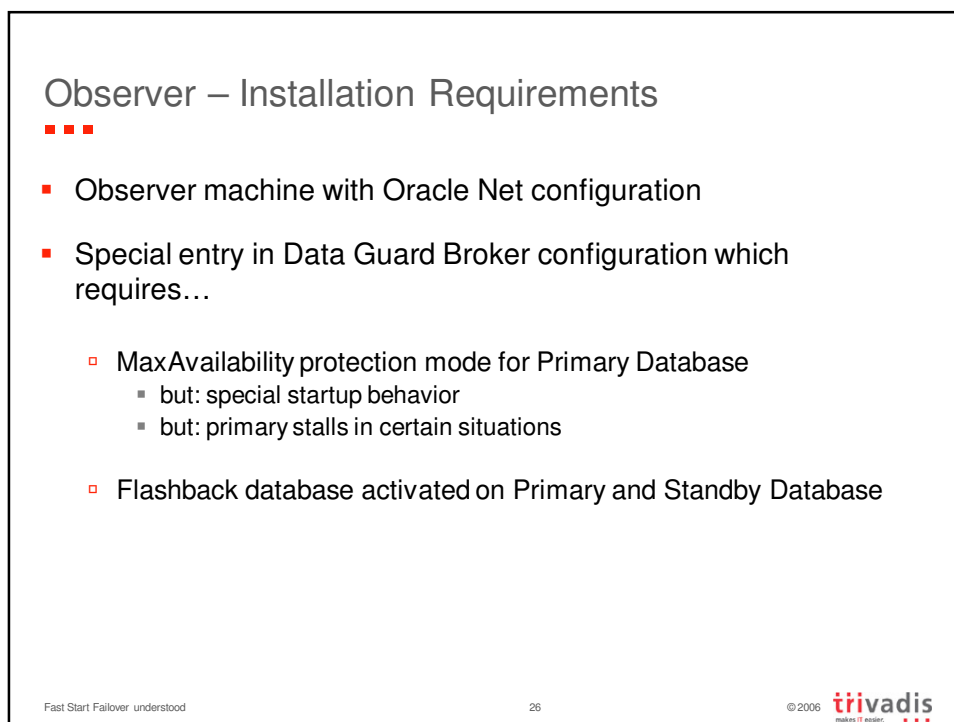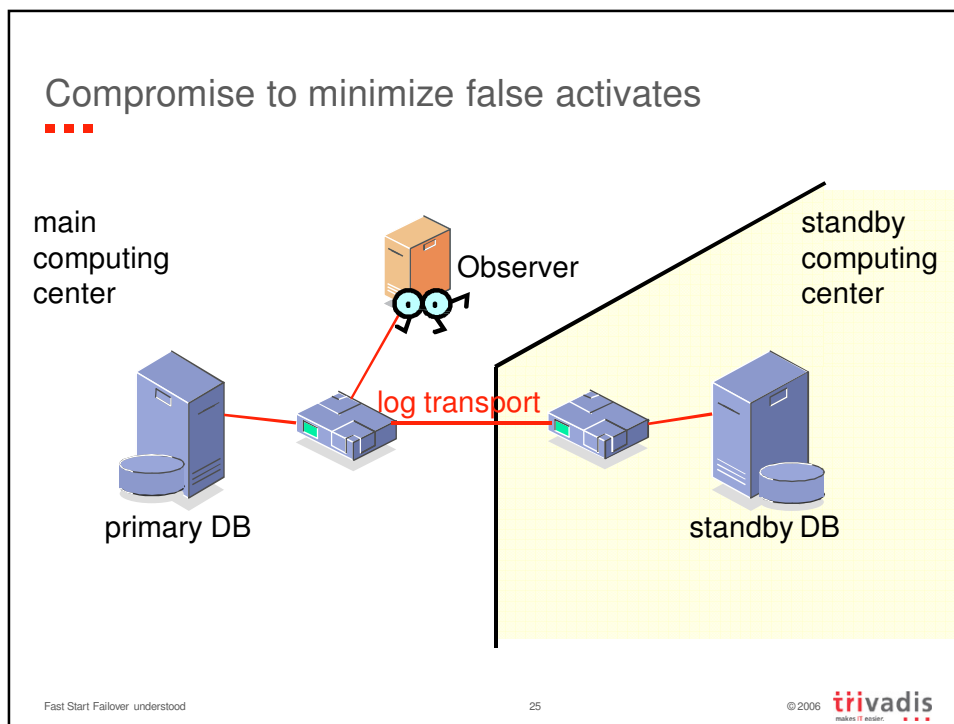

Observer – Configuration



- Not much to configure

```
edit database 'PHYS_LUCERNE'
  set property FastStartFailoverTarget = 'PHYS_TOKYO';
edit database 'PHYS_TOKYO'
  set property FastStartFailoverTarget = 'PHYS_LUCERNE';
edit configuration
  set property FastStartFailoverThreshold = 15;
enable fast_start failover;
```

- **Fast-Start Failover is a feature of Oracle Data Guard, and cannot run without a Data Guard Broker configuration!**

Fast Start Failover understood

27

© 2006 **trivadis**
making IT easier

FSFO – Does it work? (1)



- Usually it works ☺
- An interrupt (network, server crash etc.) during reinstate often results in problems
 - FSFO configuration hangs
 - The reinstating instance will not continue
 - The observer cannot be stopped (with stop observer)
 - How to solve the problem

```
dgmgrl
connect system@<new_primary>
disable fast_start failover force;
reinstat database '<old_primary>';
enable fast_start failover;
```

- If the "disable fast_start failover force" also hangs, kill/start the observer and restart the new primary instance

Fast Start Failover understood

28

© 2006 **trivadis**
making IT easier

FSFO – Does it work? (2)



- In rare cases, the whole broker configuration is corrupted
 - Remove the configuration
 - On both nodes / instances

```
sql> shutdown immediate
```

```
cd $ORACLE_BASE/admin/DG1/pfile/
mv dr1DG1.dat dr1DG1.dat.bck
mv dr2DG1.dat dr2DG1.dat.bck
```

```
sql> startup mount
```

- Recreate the configuration (good to have scripts ☺)

```
dgmgrl> create configuration 'DG1' ...
dgmgrl> add database ...
dgmgrl> edit database ... / edit configuration ...
dgmgrl> enable configuration;
dgmgrl> enable fast_start failover;
```

Fast Start Failover understood

29

© 2006 **trivadis**
making IT easier

FSFO understood!



- Concept, History and Positioning
- The startup issue
- Fast Start Failover
- Conclusion



Fast Start Failover understood

30

© 2006 **trivadis**
making IT easier

Fast Start Failover understood: Core Messages



Data is always
part of the game.

- FSFO addresses **three major** problems of 9i Data Guard
- Observer location is not easy to decide
- Things can become corrupt: Be prepared to recreate the Data Guard configuration